

# Display DDU 10



- ▶ Features new user interface menu
- ▶ All new display element design generator
- ▶ 10 additional LEDs on both sides of the device
- ▶ Supports GPS laptrigger, pre-dated lap time etc.
- ▶ Page change based on events possible

The display DDU 10 integrates a programmable full colour dashboard display with a data logging system for motorsport applications. Additional input devices can be connected via Ethernet, CAN buses and RS 232.

Data Analysis Software WinDarab is available free of charge as “WinDarab V7 free” on our website. A basic logging function of 100 channels with recording of 50 ms (4 GB) is always included. The logger can be upgraded to full logging performance (max. 1 ms). In addition, a 2nd logging partition of 4 GB can be activated.

With the DDU 10, a completely new library of graphical elements for the individual design of display pages was implemented and an all-new user interface menu has been developed for the device. A configurable input activates the menu structure and the user can reset for example laptime, fuel consumption and many more, without having to connect a laptop to the DDU. The user can also install own graphics, pictures etc. on the 12 freely configurable display pages. For quick data transfer from the car, e.g. during pit stop, data copy to a USB stick is available as an option.

## Application

Display	<ul style="list-style-type: none"> <li>• 7" graphic color display</li> <li>• 12 user configurable display pages</li> <li>• 20 multicolor freely configurable (RGB) LEDs</li> </ul>
Resolution	800 x 480 pixel
Supported image file formats	PNG, BMP, JPG, GIF
Processor	667 MHz Dual Core
Converters	10 kHz 12 bit AD converters with digital low pass filter

Internal power source	Li/Ion capacitor
Configurable math channels	
User configurable CAN in/out messages	Up to 256 IDs (128 in and out)
Online data compression	
<b>Internal logger</b>	
	<ul style="list-style-type: none"> <li>• 4 GB memory (standard)</li> <li>• Plus 4 GB memory (optional)</li> <li>• 100 channels (standard)</li> <li>• Up to 1,500 channels (optional)</li> <li>• 50 ms Sampling rate (standard)</li> <li>• max. 1 ms Sampling rate (optional)</li> </ul>
<b>Logging rates</b>	
	<ul style="list-style-type: none"> <li>• Usage of all features: 600 kB/s</li> <li>• Primary logging use case: 800 kB/s</li> <li>• Logging data download rate: up to 4 MB/s</li> </ul>
Ambient light sensor	

## Technical Specifications

### Mechanical Data

Size	198 x 134 x 35 mm
Weight	875 g
Protection classification	IP67
Operating temperature internal	-20 to 85°C
Max. vibration	Vibration profile 1 (see Appendix or <a href="http://www.bosch-motorsport.com">www.bosch-motorsport.com</a> )

### Electrical Data

Supply voltage	6 to 18 V
----------------	-----------

Current consumption (without sensor supply)	2 A (at 12 V)
---	---------------

**Inputs**

Analog channels	4 standard, plus 12 optional
Input range	0 to 5 V
Resolution	12 bit
Switchable pull up resistor	For all analog inputs
Wheel speed inputs	4 Hall-effect or DF11, switchable

**Outputs**

Sensor supply 5 V ± 1 % (250 mA)	2
Sensor supply 10 V ± 1 % (250 mA)	1
Sensor supply U_Bat (250 mA)	1
Sensor ground	4

**Environment**

External switch for page selection, 12 steps	B 261 209 658-01
External switch for brightness adjustment or page selection, 6 steps	B 261 209 659-01

**Connectors and Wires**

LIFE connector on display AS216-35PN	
Mating connector AS616-35SN	F02U.000.466-01
Auxiliary connector on display AS212-35PN	
Mating connector AS612-35SN	F02U.000.443-01

**Pin Configuration**

LIFE connector			
Pin	Name	Comment	Status
1	KL_31		Incl.
2	KL_15		Incl.
3	KL_30		Incl.
4	Rev_In_3	Hall or DF11 switchable	Incl.
5	Rev_In_1	Hall or DF11 switchable	Incl.
6	KL_31		Incl.
7	CAN_2_L	CAN speed selectable	Incl.
8	Ethernet_2_TXP		Incl.
9	Ethernet_2_TXN		Incl.
10	Sens_Power_12V	over current protected	Incl.

LIFE connector			
11	Rev_In_4	Hall or DF11 switchable	Incl.
12	Rev_In_2	Hall or DF11 switchable	Incl.
13	Laptrigger_In		Incl.
14	CAN_2_H	CAN speed selectable	Incl.
15	CAN_1_H	CAN speed selectable	Incl.
16	Ethernet_2_RXP		Incl.
17	Sens_Gnd_4	fused	Incl.
18	Sens_Power 5V	over current protected	Incl.
19	ANA_IN_3	3.01 kOhm switchable	Incl.
20	ANA_IN_4	3.01 kOhm switchable	Incl.
21	Time_Sync	connection to Bosch ECU	Incl.
22	CAN_1_L	CAN speed selectable	Incl.
23	Ethernet_screen		Incl.
24	Ethernet_2_RXN		Incl.
25	Sens_Gnd_3	fused	Incl.
26	Sens_Power 5V	over current protected	Incl.
27	ANA_IN_7	3.01 kOhm switchable	Opt.
28	ANA_IN_1	3.01 kOhm switchable	Incl.
29	USB_Device_DP	to Bosch USB stick	Opt.
30	RS232_TX_Telemetry		Incl.
31	Ethernet_1_TXP		Incl.
32	Sens_Gnd_2	fused	Incl.
33	Sens_Power_10V	over current protected	Incl.
34	ANA_IN_8	3.01 kOhm switchable	Opt.
35	ANA_IN_10	3.01 kOhm switchable	Opt.
36	USB_Device_Gnd	to Bosch USB stick	Opt.
37	USB_Device_DN	to Bosch USB stick	Opt.
38	RS232_RX_Telemetry	e.g. GSM telemetry	Incl.
39	Ethernet_1_TXN		Incl.
40	Sens_Gnd_1	fused	Incl.
41	ANA_IN_11	3.01 kOhm switchable	Opt.
42	ANA_IN_9	3.01 kOhm switchable	Opt.
43	RS232_TX_GPS		Incl.
44	ANA_IN_16	3.01 kOhm switchable	Opt.
45	USB_Device_Power	to Bosch USB stick	Opt.
46	Ethernet_1_RXP		Incl.
47	ANA_IN_12	3.01 kOhm switchable	Opt.
48	ANA_IN_6	3.01 kOhm switchable	Opt.
49	ANA_IN_2	3.01 kOhm switchable	Incl.
50	ANA_IN_13	3.01 kOhm switchable	Opt.
51	ANA_IN_15	3.01 kOhm switchable	Opt.

LIFE connector			
52	Ethernet_1_RXN		Incl.
53	ANA_IN_5	3.01 kOhm switchable	Opt.
54	RS232_RX_GPS	for GPS sensor input	Incl.
55	ANA_IN_14	3.01 kOhm switchable	Opt.

Auxiliary connector			
Pin	Name	Comment	Status
1		Unused	
2		Unused	
3		Unused	
4		Unused	
5		Unused	
6		Unused	
7		Unused	
8		Unused	
9	Ethernet_3_TXP		Incl.
10	Ethernet_3_RXP		Incl.
11	Ethernet_3_RXN		Incl.
12	CAN_4_H		Opt.
13		Unused	
14		Unused	
15		Unused	
16		Unused	
17		Unused	
18	Ethernet_screen		Incl.
19	Ethernet_3_TXN		Incl.
20	CAN_4_L		Opt.
21	CAN_3_H		Opt.
22	CAN_3_L		Opt.

## Communication

CAN interfaces	2 standard, plus 2 optional
Ethernet 100BaseT	3
Laptrigger input	1
RS232	Telemetry, GPS
Configuration via RaceCon	Over Ethernet or MSA-Box II
CCP-Master, data acquisition from ECU that support CAN calibration protocol (optional)	

## Installation Notes

Maintenance Interval: 220 h or a maximum of two years

This product may contain open source software. Information about license terms and other obligations is given in the manual.

## Legal Restrictions

The sale of this product in Mexico is prohibited. Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

## Upgrades

### CCP/XCP\_MASTER

Enables CCP/XCP master functionality to request data from foreign devices via CAN/CCP protocol, XCP over Ethernet (UDP) or XCP via CAN.

(ASAP2 file from ECU manufacturer required)

### FULL\_LOG\_1

Extension for Partition 1

- 1,500 channels
- fastest sampling 1,000 Hz or 1 syncro

### FULL\_LOG\_2

Enable full logging performance of 4 GB Partition 2

### IO\_EXTENS

Enable additional 12 analog inputs and 2 CAN channels

### USB\_DATA

Rugged USB flash drive Bosch File System (BFS) format included, works with Bosch File System (BFS) preformatted USB Flash drive only

Adapter cable to USB-Port

Adapter for wiring harness

SW license USB-Port unlocked

## Ordering Information

### Display DDU 10

Order number **F02U.V02.659-02**

### Software Options

#### CCP/XCP\_MASTER

Order number **F02U.V02.213-01**

#### FULL\_LOG\_1

Order number **F02U.V02.304-01**

#### FULL\_LOG\_2

Order number **F02U.V02.305-01**

#### IO\_EXTENS

Order number **F02U.V02.205-01**

### Accessories

#### USB\_DATA

Order number **F02U.V02.214-01**

#### CAN Keypad CK-M12

Order number **F02U.V0U.328-04**



#### Vehicle Loom Basic

Order number **F02U.V02.735-01**

#### Bench Loom

Order number **F02U.V02.349-01**

Dimensions

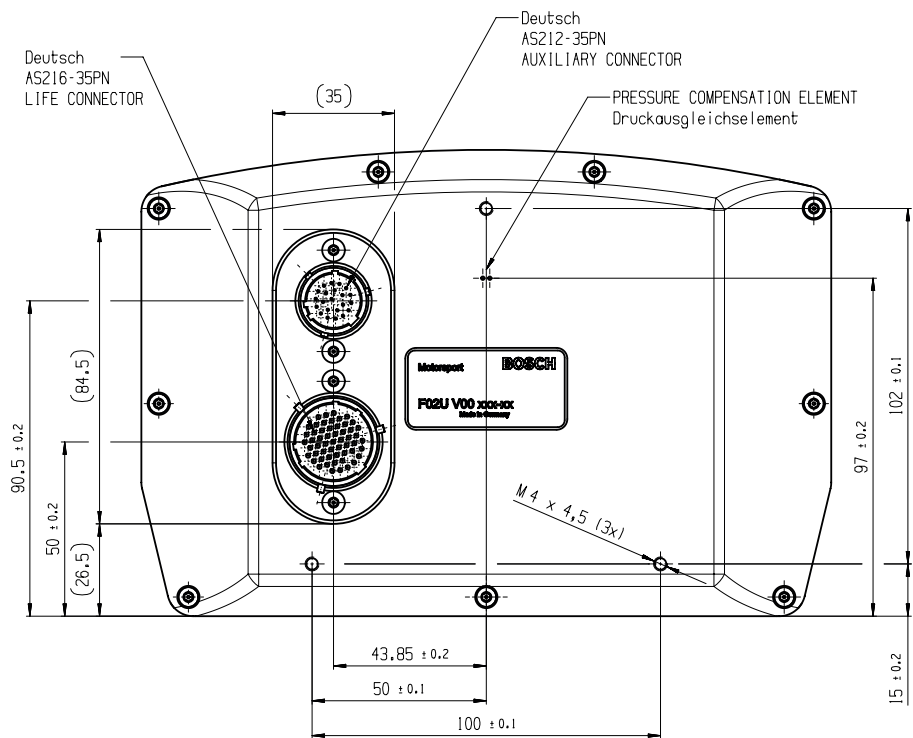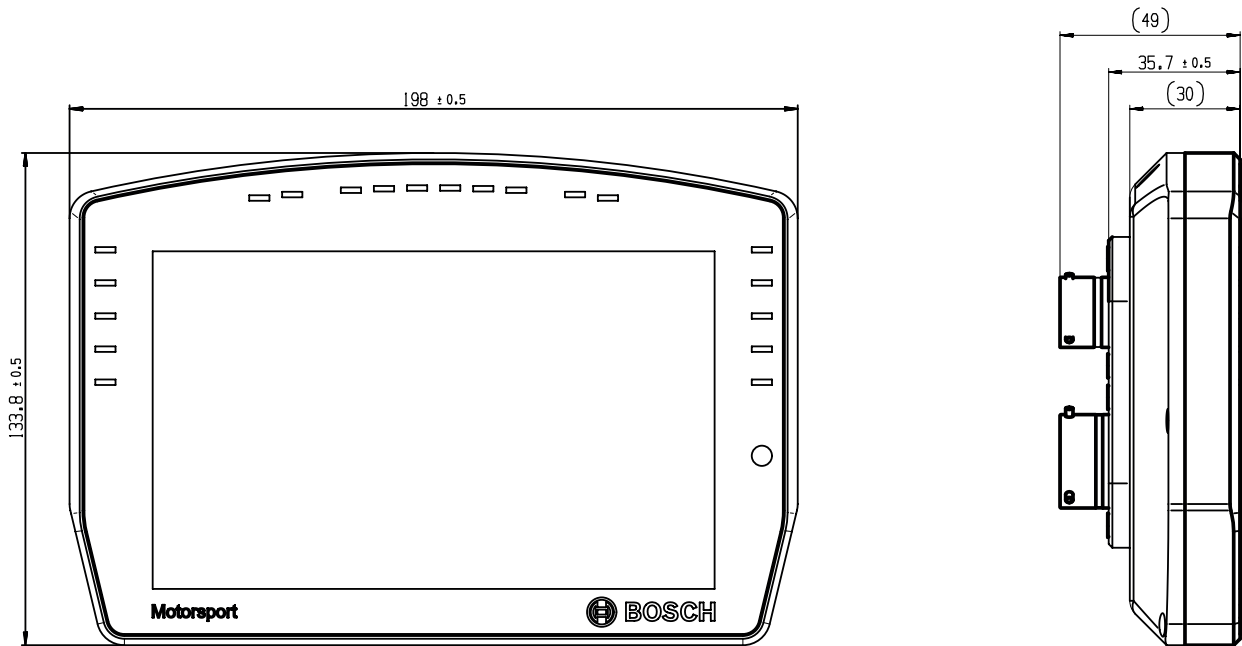

Represented by:

**Europe:**  
 Bosch Engineering GmbH  
 Motorsport  
 Robert-Bosch-Allee 1  
 74232 Abstatt  
 Germany  
 Tel.: +49 7062 911 9101  
 Fax: +49 7062 911 79104  
 motorsport@bosch.com  
 www.bosch-motorsport.de

**North America:**  
 Bosch Engineering North America  
 Motorsport  
 38000 Hills Tech Drive  
 Farmington Hills, MI 48331-3417  
 United States of America  
 Tel.: +1 248 876 2977  
 Fax: +1 248 876 7373  
 motorsport@bosch.com  
 www.bosch-motorsport.com

**Asia-Pacific:**  
 Bosch Engineering Japan K.K.  
 Motorsport  
 18F Queen's Tower C, 2-3-5 Minato  
 Mirai Nishi-ku, Yokohama-shi  
 Kanagawa 220-6218  
 Japan  
 Tel.: +81 45 650 5610  
 Fax: +81 45 650 5611  
 www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
 Robert Bosch Pty. Ltd  
 Motorsport  
 1555 Centre Road  
 Clayton, Victoria, 3168  
 Australia  
 Tel.: +61 (3) 9541 3901  
 motor.sport@au.bosch.com